

Safety Instructions

Liquiline M CM42

Supplement to:
BA00381C and BA00382C

Safety instructions for electrical apparatus in explosion-hazardous areas



Liquiline M CM42

Supplement to:
BA00381C and BA00382C

Table of contents

Associated documentation	3
Supplementary documentation	3
Identification	3
Safety instructions	3
Temperature tables	4
Connection data	4
Connection diagram	6

Associated documentation This document is an integral part of Operating Instructions BA00381C and BA00382C.

Supplementary documentation



- Competence Brochure CP0002 1Z
- Explosion Protection: Guidelines and General Principles
 - www.endress.com

Identification

The nameplate provides you with the following information on your device:

- Manufacturer identification
- Extended order code
- Serial number
- Firmware version
- Safety information and warnings
- Ex labeling on hazardous area versions
- Certificate information

► Compare the information on the nameplate with the order.

Type code

Type	Version			
CM42-	*	K	*	(+*)
	No Ex relevance	1Ex ib [ia Ga] IIC T6/T4 Gb X	No Ex relevance	

Certificates and approvals

Ex approval

The product has been certified in accordance with Directive TR CU 012/2011 valid within the Eurasian Economic Area (EAEU). The EAC conformity mark has been affixed to the product.

EAC Ex, 1Ex ib [ia Ga] IIC T6/T4 Gb X

Zone 1, connected sensors in Zone 0

Certificate number: TC RU C-DE.AA87.B.00566/20

Certification body

ООО "НАИО ЦСВЭ"

Russian Federation

Safety instructions

The transmitter meets the fundamental requirements of the applicable standards and is suitable for use in hazardous areas.

- The transmitter is an intrinsically safe electrical apparatus for use in Zone 1 with Gb instrument protection rating.
- You may only connect suitable sensors and must use them as designated according to the Operating Instructions.
- Suitable sensors, which may be arranged in Zone 0, can be connected to the sensor circuits. Suitable sensors bear a red ring.
- The transmitter may only be connected to suitable transmitter power supply units or fieldbus systems according to the FISCO model.
- Pay attention to the information in the Operating Instructions regarding the characteristic values of the input and output circuits.
- Devices with a stainless steel housing must be connected to the local potential equalization system of the place of installation.

- Only genuine spare parts may be used for maintenance or repair measures on the device. These measures may only be performed by service staff or properly trained and authorized technical staff.
- Installation, electrical connection, commissioning, inspection, maintenance and repair may only be performed by qualified specialists trained to work on explosion protected devices in accordance with the applicable standards, e.g. EN 60079-14, -17, -19. Comply with the instructions in the Operating Instructions.
- To avoid electrostatic charge, the device is fitted with a warning label bearing the following information: "Protect against electrostatic charge. Clean the device with a damp cloth only."

Temperature tables

	Temperature class	
	T4	T6
Ambient temperature T_a	-20 to +55 °C	-20 to +50 °C

If the specified process temperatures are complied with, temperatures that are not permitted for the respective temperature class will not occur on the equipment.

Connection data

Ex-specification, current output

Intrinsically safe power supply and signal circuits, passive	
Max. input voltage U_i	30 V
Max. input current I_i	100 mA
Max. input power P_i	800 mW
Max. internal inductance L_i	29 μ H (output 1) 24 μ H (output 2)
Max. internal capacitance C_i	1.2 nF (output 1) 0.2 nF (output 2)

Ex-specification PROFIBUS and FOUNDATION Fieldbus

Suitable for use as a field device in a FISCO system according to EN/IEC 60079-27	
Max. input voltage U_i	17.5 V
Max. input current I_i	380 mA
Max. input power P_i	5.32 W
Max. internal inductance L_i	< 10 μ H
Max. internal capacitance C_i	< 5 nF

Connecting Memosens sensors

Intrinsically safe sensor circuit with type of protection: OEx ia IIC	
Max. output voltage U_o	5.04 V
Max. output current I_o	80 mA
Max. output power P_o	112 mW


Connecting analog pH/ORP sensors

Intrinsically safe sensor circuit with type of protection: OEx ia IIC		
	Glass	ISFET
Max. output voltage U_o	10.08 V	10.08 V
Max. output current I_o	4.1 mA	50.7 mA
Max. output power P_o	10.2 mW	128 mW
Max. external inductance L_o	1 mH	1 mH
Max. external capacitance C_o	250 nF	250 nF

Connecting analog conductivity sensors with inductive measurement of conductivity


Intrinsically safe sensor circuit with type of protection: OEx ia IIC	
Max. output voltage U_o	10.08 V
Max. output current I_o	64 mA
Max. output power P_o	128 mW
Max. external inductance L_o	0.1 mH
Max. external capacitance C_o	1.8 μ F

Connection diagram

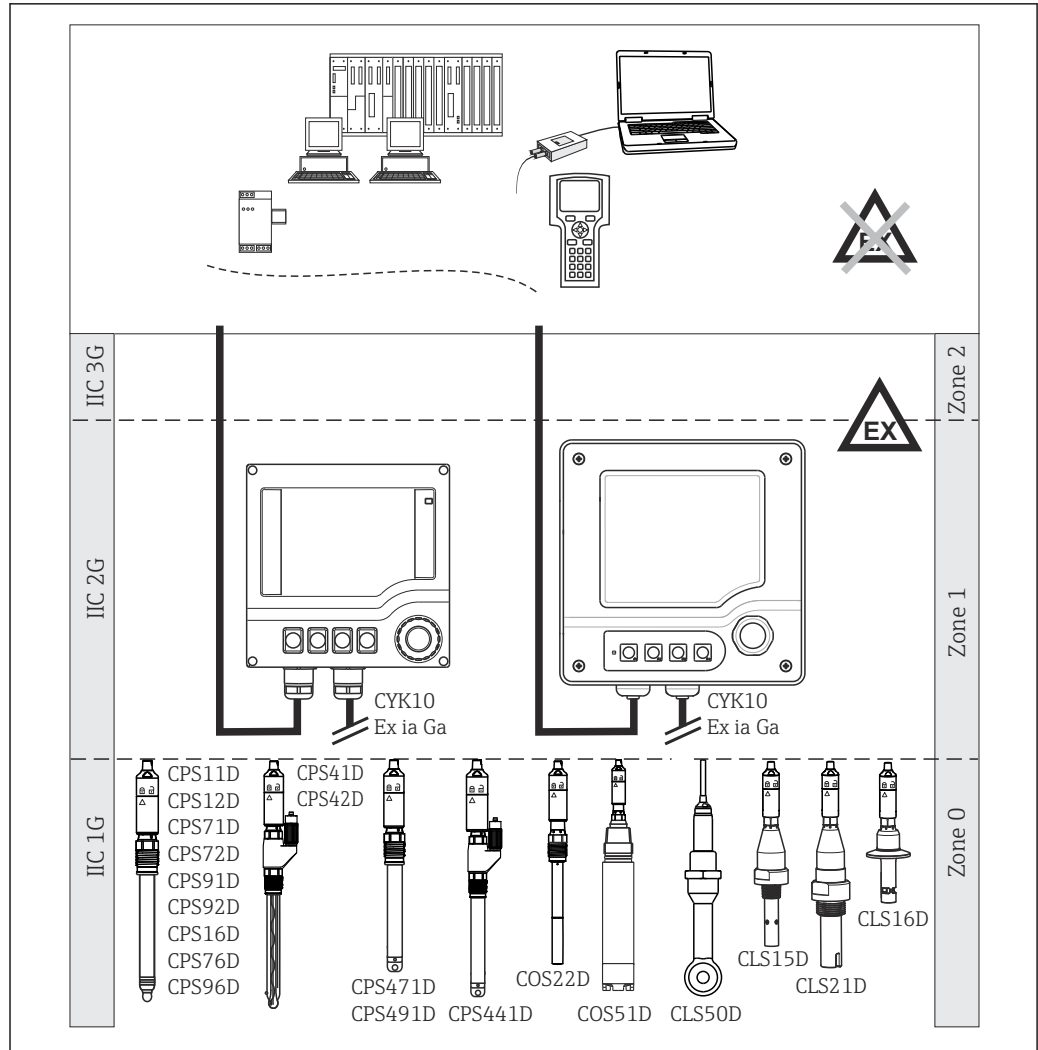

A0030534

1 Memosens sensors

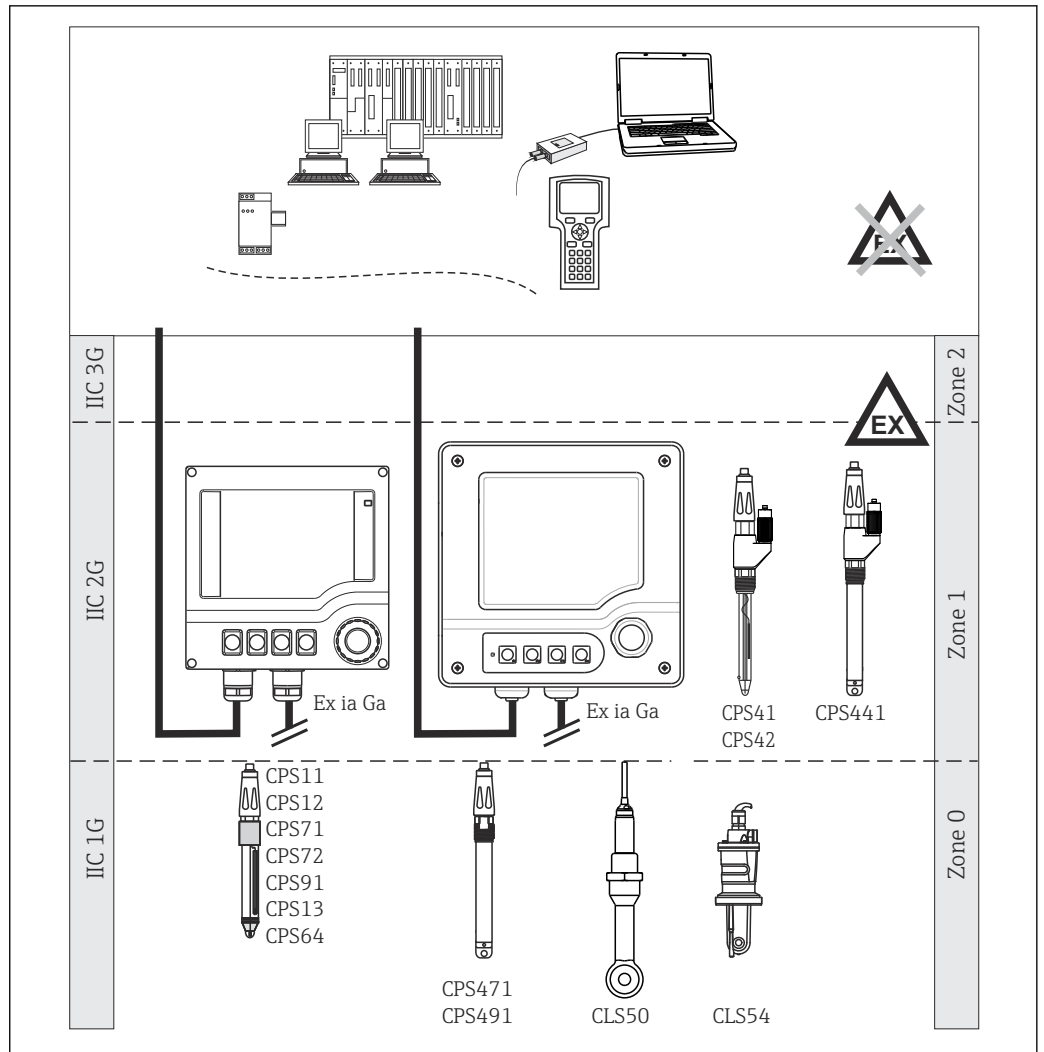

A0030536

2 Analog sensors



www.addresses.endress.com
