


Hazardous (Classified) Locations
 Class I, Groups ABCD
 Class II, Groups EFG
 Class III
 Class I, Zone 0 Group IIC
 Class I, Zone 2 Group IIC

Nonhazardous Locations



FM approved intrinsically safe apparatus

L/-, L/+

Installation Notes RIA46

- FM Approved Apparatus must be installed in accordance with manufacturer's instructions and the control drawing.
- Depending on location install per National Electrical Code (NEC) using wiring methods described in article 500 through article 510.
- Use supply wires suitable for 5°C above surroundings.




INTRINSICALLY SAFE CONNECTION TO Class I, II, III / Div. 1+2 / Groups ABCDEFG

- The device is an Associated intrinsically safe equipment and must be installed in Division 2 or non-hazardous locations only.
- Installation should be in accordance with ANSI/ISA RP 12.06.01 "Installation of Intrinsically safe systems for Hazardous (classified) locations" and the National Electrical Code (ANSI/NFPA 70).
- For entity installations use certified equipment that satisfy the following condition
 $U_o/V_o \leq V_{max}/U_i$ $I_o/I_{sc} \leq I_{max}/I_i$ $P_o \leq P_i$ $C_o/C_a \geq C_i + C_{cable}$ $L_o/L_a \geq L_i + L_{cable}$
- The Terminal of the intrinsically safe circuit must be placed at least a distance of 50mm from terminals of the non intrinsically safe circuits, or adequate separators (e.g. ground metal partitions) must be used.

NONINCENDIVE Field WIRING CONNECTION TO Class I, II, III / Div. 2 / Groups ABCDEFG

- The device is an Associated Nonincendive safe equipment and must be installed in Division 2 or non-hazardous locations only.
- The Nonincendive Field Wiring Circuit Concept allows interconnection of Nonincendive Field Wiring Apparatus with Associated Nonincendive Field Wiring Apparatus or Associated Intrinsically Safe Apparatus or Associated Apparatus not specifically examined in combination as a system using any of the wiring methods permitted for unclassified locations, when $V_{oc} \leq V_{max}$, $C_a \geq C_i + C_{cable}$, $L_a \geq L_i + L_{cable}$.

Note wiring scheme on device!

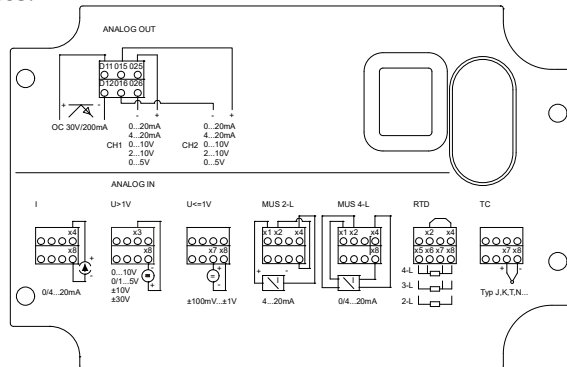

	Approved Pfanzelt	Date (yyyy-mm-dd) 2009-06-03	Drawing No. 12 04 00 111	Dwg.rev. -	Revision no. -	Revision date (yyyy-mm-dd) -	Name -	Material 71540266 XA02312R/09/EN/01.20	Endress+Hauser
Volume (mm³)	Designed Pfanzelt	Date (yyyy-mm-dd) 2009-05-11	Unit RIA46	Scale 1:1	Title CONTROL DRAWING FM approval AIS, ANI		Serie Objekt version Sheet 1 of 2		
Refer to protection notice ISO 16016	Edge of working parts ISO 13715	Geometrical tolerancing ISO 2768-mH-E	Part No. -	Format A4			Endress + Hauser Wetzer GmbH+Co. KG Nesselwang / Germany		



Temperature range

Ta -20°C ... +60°C

AIS

Class I, II, III, Div. 1+2, Groups ABCDEFG

ANI

Cl. I, Zone 0 [AEx ia] IIC

Class I, II, III, Div. 2, Groups ABCDEFG

Power supply U ≤ 24...230 V AC/DC (-20%/+10%) 50/60 Hz

Terminal LI+, LI-, PE

Output circuit limit relays U_{max} ≤ 250 VAC I_{max} ≤ 3A
Terminal R12, R11, R13 or U_{max} ≤ 30 DC I_{max} ≤ 3A
R22, R21, R23

CDI interface for device configuration

Impulse or Current output 0/4...20 mA
Terminal O15, O16 or O25, O26 U_m ≤ 250 V

Output collector I_{max} ≤ 200 mA
Terminal D11, D12 U_m ≤ 30 V

2-wire transmitter power supply: Voc ≤ 27.3 V
Terminal 11, 14, 12, 18 Isc ≤ 96.5 mA
21, 24, 22, 28 Po = 659 mW

Group A, B resp. IIC Li = 75µH Ca = 88 nF La = 4.2 mH
Group C, D resp. IIB, IIA Ca = 683 nF La = 17.1mH

4-wire transmitter power supply:
Terminal 11, 12, 21, 22

Voc ≤ 27.3 V
Isc ≤ 91.1 mA
Po = 622 mW
Ci = 8nF
Li = 75µH
Ca = 88 nF La = 4.7 mH
Ca = 683 nF La = 19.2 mH

Group A, B resp. IIC
Group C, D resp. IIB, IIA

4-wire transmitter power supply:
Terminal 14, 18, 24, 28

Voc ≤ 27.3 V
Isc ≤ 5 mA
Po = 34.2 mW
Ci = 8nF
Li = 75µH
Ca = 88 nF La = 1.6 H
Ca = 683 nF La = 6.4 H

Group A, B resp. IIC
Group C, D resp. IIB, IIA

temperature input:
Terminal 15, 16, 17, 18

Voc ≤ 27.3 V
Isc ≤ 22.1 mA
Po = 151 mW
Ci = 8nF
Li = 75µH
Ca = 88 nF La = 81.8 mH
Ca = 683 nF La = 327.5 mH

Group A, B resp. IIC
Group C, D resp. IIB, IIA

Current input:
Terminal 14, 18, 24, 28

Voc ≤ 27.3 V
Isc ≤ 5 mA
Po = 34.2 mW
Ci = 8nF
Li = 75µH
Ca = 88 nF La = 1.6 H
Ca = 683 nF La = 6.4 H

Group A, B resp. IIC
Group C, D resp. IIB, IIA

Voltage input:
Terminal 17, 18, 13, 18
27, 28, 23, 28

Voc ≤ 27.3 V
Isc ≤ 5 mA
Po = 34.2 mW
Ci = 8nF
Li = 75µH
Ca = 88 nF La = 1.6 H
Ca = 683 nF La = 6.4 H

Group A, B resp. IIC
Group C, D resp. IIB, IIA

	Approved Pfanzelt	Date (yyyy-mm-dd) 2009-06-03	Drawing No. 12 04 00 111	Dwg.rev. -	Revision no. -	Revision date (yyyy-mm-dd) -	Name -	Material 71540266 XA02312R/09/EN/01.20	Endress+Hauser
Volume (mm³)	Designed Pfanzelt	Date (yyyy-mm-dd) 2009-05-11	Unit RIA46	Scale 1:1	Title CONTROL DRAWING FM approval AIS, ANI			Serie	
Refer to protection notice ISO 16016	Edge of working parts ISO 13715	Geometrical tolerancing ISO 2768-mH-E	Part No. -	Format A4	Objekt version	Sheet 2 of 2	Endress + Hauser Wetzler GmbH+Co. KG Nesselwang / Germany		