

ZD 050P/00/en/11.01/CCS
CSA / B 19.07.01



Control drawing (IS) 960364-2075 B

Cerabar S / Deltabar S
Foundation Fieldbus

Endress + Hauser



The Cerabar S/Deltabar S with electronic insert for Foundation Fieldbus is suitable for the connection to a Foundation Fieldbus (FF) system according to both the Entity-Concept or the FISCO-Concept (as described below).

FISCO-Concept

The FISCO Concept allows interconnection of intrinsically safe apparatus to associated apparatus not specifically examined in such combination. The criteria for interconnection is that the voltage (Ui or Vmax), the current (Ii or Imax) and the power (Pi or Pmax) which intrinsically safe apparatus can receive and remain intrinsically safe, considering faults, must be equal or greater than the voltage (Uo or Voc or Vt), the current (Io or Isc or It) and the power (Po or Pmax) levels which can be delivered by the associated apparatus, considering faults and applicable factors. In addition, the maximum unprotected capacitance (C) and inductance (Li) of each apparatus (other than the termination) connected to the fieldbus must be less than or equal to 5 nF and 10 µH respectively. In each segment only one active device, normally the associated apparatus, is allowed to provide the necessary energy for the fieldbus system. The voltage Uo (or Voc or Vt) of the associated apparatus has to be limited to the range of 14V to 24V DC. All other equipment connected to the bus cable has to be passive, meaning that they are not allowed to provide energy to the system, except to a leakage current of 50 µA for each connected device. Separately powered equipment needs a galvanic isolation to assure that the intrinsically safe fieldbus circuit remains passive.

The cable used to interconnect the devices needs to have the parameters in the following range:

loop resistance R :	15 ... 150 Ω/km
inductance per unit length Li :	0.4 ... 1 mH/km
capacitance per unit length C :	80 ... 200 nF/km
C = C' line/line + 0.5 C' line/screen, if both lines are floating or one line	
length of spur cable:	≤ 30 m
length of trunk cable:	≤ 1 km
length of splice:	≤ 1 m

At each end of the trunk cable an approved infallible line termination with the following parameters is suitable:

$$R = 90 \dots 100 \Omega$$

$$C = 0 \dots 2.2 \mu\text{F}$$

One of the allowed terminations might already be integrated in the associated apparatus.

The number of passive devices connected to the bus segment is not limited due to I.S. reasons. If the above rules are respected, up to a total length of 1000 m (sum of the length of trunk cable and all spur cables), the inductance and capacitance of the cable will not impair the intrinsic safety of the installation.

Notes:

1. CSA certified apparatus must be installed in accordance with manufacturer instructions
2. CSA certified associated apparatus must meet the following requirements:
Uo or Voc or Vt ≤ Ui (Vmax) and Io or Isc or It ≤ Ii (Imax) and Po or Pmax ≤ Pi (Pmax)
3. The maximum non-hazardous area voltage must not exceed 250 V.
4. The installation must be in accordance with the Canadian Electrical Code.
5. Multiple earthing of screen is allowed only, if high integrity equipotential system is realised between the points of bonding (see drawing No. 960373-1022 A).
6. Caution: Use only supply wires suitable for 5°C above surrounding temperature
7. Warning: Substitution of components may impair intrinsic safety.
8. The polarity for connecting FF+ (2) and FF- (1) is of no importance due to an internal rectifier.


Suitable for CLASS I, DIV. 2, GROUPS A, B, C, D HAZARDOUS LOCATION INSTALLATION.

1. INSTALL PER CANADIAN ELECTRICAL CODE (CEC) USING THREADED METAL CONDUIT. Intrinsic safety barrier not required. Max. supply voltage 30 V. For T-code see table.
 2. WARNING: Explosion Hazard – do not disconnect equipment unless power has been switched off or the area is known to be Non-Hazardous. AVERTISSEMENT: Risque d'explosion – Ne pas débrancher tant que le circuit est sous tension, à moins qu'il s'agisse d'un emplacement non dangereux.
- WARNING: Explosion HAZARD – Substitution of components may impair suitability for CLASS I, Division 2.
AVERTISSEMENT: Risque d'explosion – La substitution de composant peut rendre ce matériel inacceptable pour les emplacements de Class I, Div. 2.

HAZARDOUS (CLASSIFIED) LOCATION

Ex ia IIC T6
Class I, Division 1, Groups A, B, C, D
Class II, Division 1, Groups E, F, G
Class III, Division 1

NONHAZARDOUS LOCATION

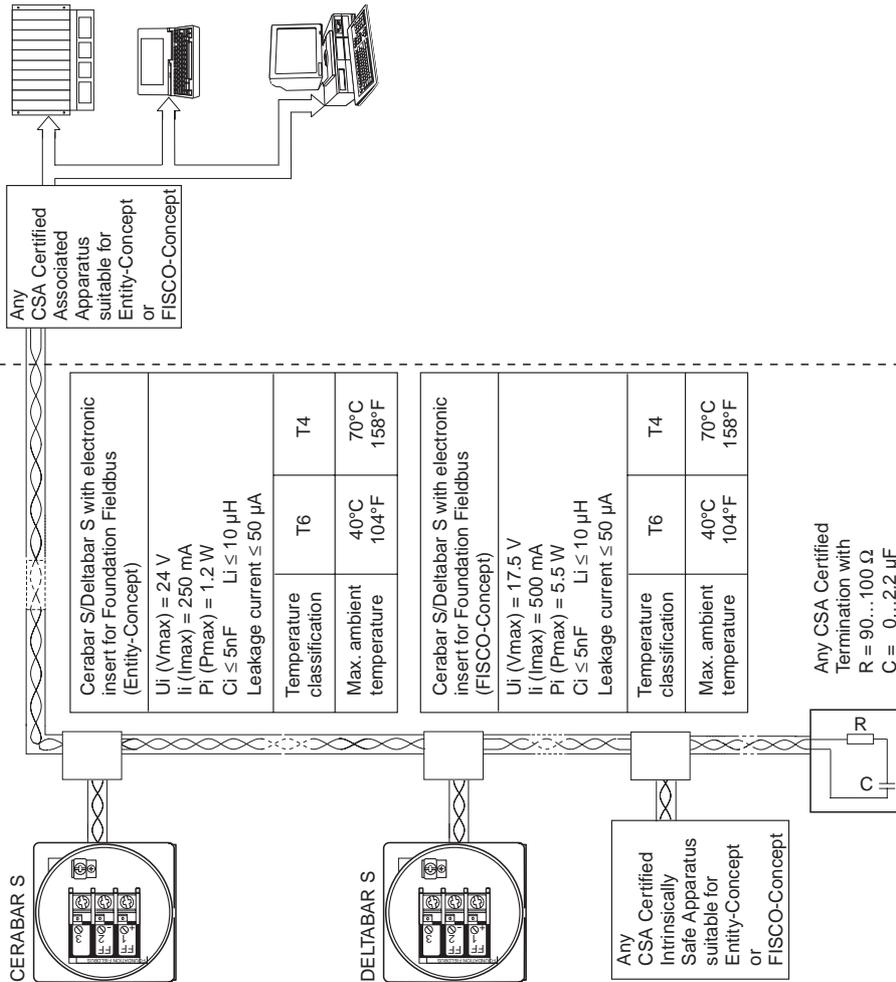

Any CSA Certified Termination with
R = 90...100 Ω
C = 0...2.2 µF