


Hazardous (Classified) Locations  
Class I, Division 2, Groups ABCD



Non-hazardous area

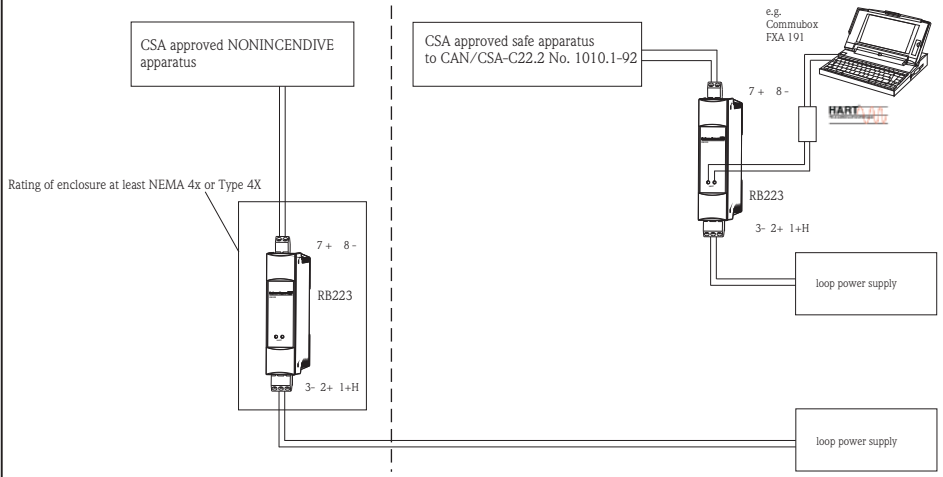

**Transmission from hazardous (classified) to Non-hazardous area:**

(Terminals 1+ H, 2+, 3- and optionally 4+ H, 5+, 6-)  
 $U_m \leq 30$  VDC (loop powered)     $I_m \leq 100$  mA

(Terminals 7 + 8 – and optionally 9+, 10-)  
 $V_{max}$  or  $U_i \leq 30$ V     $C_i = 0$   
 $I_{max}$  or  $I_i \leq 100$ mA     $L_i = 0$   
 $P_i \leq 750$ mW

$U_o$  or  $V_{oc} = 0$      $I_o$  or  $I_{sc} = 0$



**Installation Notes RB223**

- CSA Approved Apparatus must be installed in accordance with manufacturer's instructions.
- Depending on location install per National Electrical Code (CEC) using wiring methods.
- Use supply wires suitable for 5°C above surroundings.
- For hazardous area Class I install the device of Protection Ratings of least NEMA 4X, Type 4X.
- For Non-hazardous area install the device of Protection Ratings of least NEMA 1, Type 1
- Warning: Substitution of components may impair suitability for Class I, Division 2.

**NONINCENDIVE Field WIRING INSTALLATION Class I / Div. 2 / Groups ABCD**

- The device is a Nonincendive equipment and must be installed in Division 2 or nonhazardous Locations only.
- The Nonincendive Field Wiring Concept allows interconnection of Nonincendive Field Wiring Apparatus with Associated Nonincendive Field Wiring Apparatus or Associated Intrinsically Safe Apparatus or Associated Apparatus not specifically examined in combination as a system using any of the wiring methods permitted for unclassified locations, when  $V_{oc} \leq V_{max}$ ,  $C_a \geq C_i + C_{cable}$ ,  $L_a \geq L_i + L_{cable}$ .
- For entity installations use certified equipment that satisfy the following condition  
 $U_o/V_{oc} \leq V_{max}/U_i$      $I_o/I_{sc} \leq I_{max}/I_i$      $P_o \leq P_i$      $C_o/C_a \geq C_i + C_{cable}$      $L_o/L_a \geq L_i + L_{cable}$

NONINCENDIVE

Class I / Div. 2 / Groups ABCD

T4    -20°C ... +60°C

**Transmission from Non-hazardous to hazardous (classified) area:**

Supply (Terminals 1+ H, 2+, 3- and optionally 4+ H, 5+, 6-)

$U_m \leq 30$  VDC (loop powered)     $I_m \leq 100$  mA

Output (Terminals 7 + 8 – and optionally 9+, 10-)

$U_o$  or  $V_{oc} = 27.3$  V     $I_o$  or  $I_{sc} = 91.6$  mA     $P_o = 626$  mW

Group A, B	resp.	[Ex ia] IIC	$C_o$ or $C_a = 88$ nF	$L_o$ or $L_a = 4.7$ mH
Group C	resp.	[Ex ia] IIB	$C_o$ or $C_a = 683$ nF	$L_o$ or $L_a = 19$ mH
Group D	resp.	[Ex ia] IIA	$C_o$ or $C_a = 683$ nF	$L_o$ or $L_a = 19$ mH

**Functional ratings**

These ratings do not supersede Hazardous Location values

$U_{nom} \leq 30$  DC     $I_{nom} \leq 4$  to 20 mA

Approved	Pfanzelt	Date (yyyy-mm-dd)	2007-02-19	Drawing No.	02 20 00 113	Dwg.rev.		Revision no.		Revision date (yyyy-mm-dd)		Name		Material	71042256 ZD065R/09/en/04.07	<b>Endress+Hauser</b>
Designed	Pfanzelt	Date (yyyy-mm-dd)	2006-07-25	Unit	RB 223	Scale	1:1	Title	<b>CONTROL DRAWING CSA NONINCENDIVE</b>		Series		Objekt version	Sheet	1 of 1	
Refer to protection notice ISO 16016	Edge of working parts ISO 13715	Geometrical tolerancing ISO 2768-mH-E	Part No.	-		Format	A4									Endress + Hauser Wetzer GmbH+Co. KG Nesselwang / Germany