

Safety Instructions

Nivotester FTW325

[Ex ia Ga] IIC



Nivotester FTW325

Table of contents

About this document	4
Associated documentation	4
Supplementary documentation	4
Manufacturer's certificates	4
Manufacturer address	4
Extended order code	4
Safety instructions: General	7
Safety instructions: Installation	8
Temperature tables	10
Connection data	10

About this document

This document has been translated into several languages. Legally determined is solely the English source text.

Associated documentation

This document is an integral part of the following Operating Instructions:

KA00199F/00, TI00373F/00

Supplementary documentation

Explosion-protection brochure: CP00021Z/11

The Explosion-protection brochure is available:

- In the download area of the Endress+Hauser website:
www.endress.com -> Downloads -> Media Type: Documentation -> Documentation Type: Brochures and catalogs -> Text Search: CP00021Z
- On the CD for devices with CD-based documentation

Manufacturer's certificates**NEPSI Declaration of Conformity**

Certificate number:

GYJ20.1615

Affixing the certificate number certifies conformity with the following standards (depending on the device version):

- GB 3836.1-2010
- GB 3836.4-2010
- GB 3836.20-2010

Manufacturer address

Endress+Hauser SE+Co. KG

Hauptstraße 1

79689 Maulburg, Germany

Address of the manufacturing plant: See nameplate.

Extended order code

The extended order code is indicated on the nameplate, which is affixed to the device in such a way that it is clearly visible. Additional information about the nameplate is provided in the associated Operating Instructions.

Structure of the extended order code

FTW325	-	*****	+	A*B*C*D*E*F*G*..
<i>(Device type)</i>		<i>(Basic specifications)</i>		<i>(Optional specifications)</i>

* = Placeholder

At this position, an option (number or letter) selected from the specification is displayed instead of the placeholders.

Basic specifications

The features that are absolutely essential for the device (mandatory features) are specified in the basic specifications. The number of positions depends on the number of features available.

The selected option of a feature can consist of several positions.

Optional specifications

The optional specifications describe additional features for the device (optional features). The number of positions depends on the number of features available. The features have a 2-digit structure to aid identification (e.g. JA). The first digit (ID) stands for the feature group and consists of a number or a letter (e.g. J = Test, Certificate). The second digit constitutes the value that stands for the feature within the group (e.g. A = 3.1 material (wetted parts), inspection certificate).

More detailed information about the device is provided in the following tables. These tables describe the individual positions and IDs in the extended order code which are relevant to hazardous locations.

Extended order code: Nivotester



The following specifications reproduce an extract from the product structure and are used to assign:

- This documentation to the device (using the extended order code on the nameplate).
- The device options cited in the document.

Device type

FTW325

Basic specifications

Position 1 (Approval)		
Selected option	Description	
FTW325	1	NEPSI [Ex ia Ga] IIC

Position 2 (Housing)		
Selected option	Description	
FTW325	2	Rail mounting, 22.5 mm, 2-channel

Position 3 (Power Supply)		
Selected option	Description	
FTW325	A	85-253 V AC
	B	20-30 V AC / 20-60 V DC

Position 4 (Switch Output)		
Selected option	Description	
FTW325	1	1x SPDT level + 1x SPST alarm


Optional specifications

No options specific to hazardous locations are available.

**Safety
instructions:
General**

- Staff must meet the following conditions for mounting, electrical installation, commissioning and maintenance of the device:
 - Be suitably qualified for their role and the tasks they perform
 - Be trained in explosion protection
 - Be familiar with national regulations
- For installation, use and maintenance of the device, users must also observe the requirements stated in the Operating Instructions and the standards:
 - GB 50257-2014: "Code for construction and acceptance of electric device for explosion atmospheres and fire hazard electrical equipment installation engineering".
 - GB 3836.13-2013: "Explosive atmospheres, Part 13: Equipment repair, overhaul and reclamation".
 - GB/T 3836.15-2017: "Explosive atmospheres, Part 15: Electrical installations design, selection and erection".
 - GB/T 3836.16-2017: "Explosive atmospheres, Part 16: Electrical installations inspection and maintenance".
 - GB/T 3836.18-2017: "Explosive atmospheres, Part 18: Intrinsically safe electrical systems".
- Comply with the installation and safety instructions in the Operating Instructions.
- Install the device according to the manufacturer's instructions and national regulations.
- Do not operate the device outside the specified electrical, thermal and mechanical parameters.
- Avoid electrostatic charging.


Safety instructions:
Installation

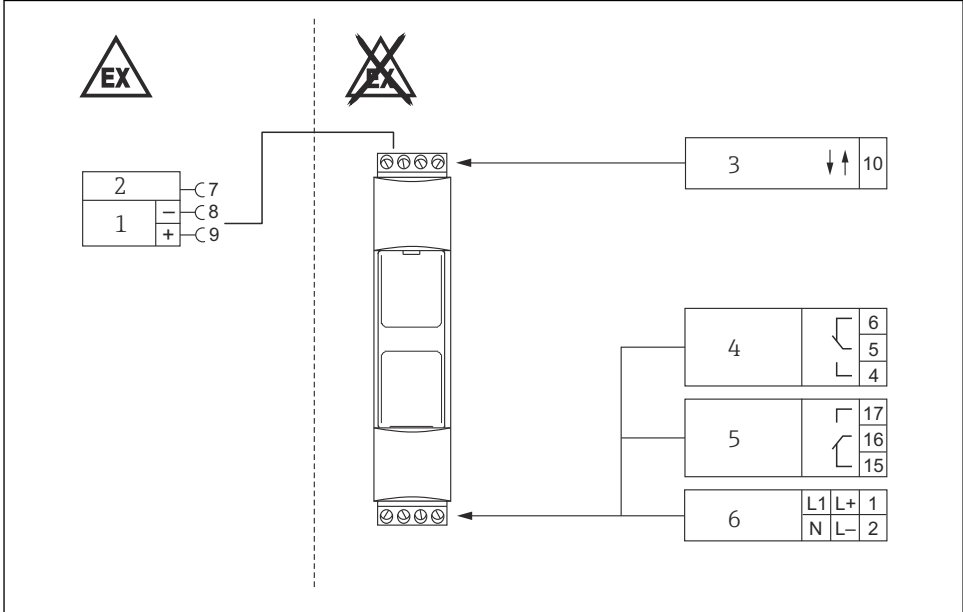

A0034704

1

- 1 Sensor, Limit level Ex ia IIC/IIB
- 2 Earth
- 3 Master / Slave
- 4 Limit relay 1
- 5 Limit relay 2 / Alarm relay
- 6 Power supply

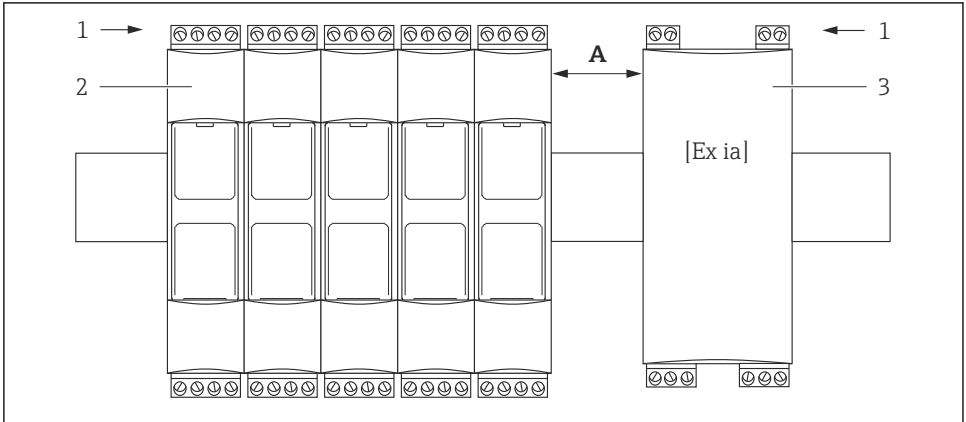

A0034705

 2

- A *Min. 6 mm*
 1 *Intrinsically safe contacts*
 2 *Nivotester FTW325*
 3 *Other type, other product*

- To achieve an ingress protection of at least IP55: Protect the device from dust and humidity, e.g. in control rooms, or located in a suitable protective housing.
- The device is an associated apparatus: Only use the device outside explosion hazardous areas.
- There must be a distance (thread measure) of at least 50 mm between intrinsically safe and nonintrinsically safe terminals.
- When combining the device with other types and products on the same top-hat rail: Keep the distances comply to the relevant standards and rules.
- When combining with devices from other manufacturers: Observe ingress protection of the housing.

Intrinsic safety

- Observe the pertinent guidelines when interconnecting intrinsically safe circuits.
- The intrinsically-safe input circuits are galvanically isolated from other circuits up to a peak value of the nominal voltage of 375 V.
- All devices that are connected to the intrinsically safe circuits must be included in the potential equalization.

Temperature tables

Ambient temperature range	
Individual installation	$-20\text{ °C} \leq T_a \leq +60\text{ °C}$
Series installation	$-20\text{ °C} \leq T_a \leq +50\text{ °C}$

Connection data

Power supply circuit	
Terminal connections: 1, 2	AC voltage $U = 85 \text{ to } 253\text{ V}_{AC}, 50/60\text{ Hz}$ $P \leq 5.2\text{ VA}$
	DC voltage $U = 20 \text{ to } 60\text{ V}_{DC}$ $U = 20 \text{ to } 30\text{ V}_{AC}, 50/60\text{ Hz}$ $P \leq 1.2\text{ W}$ $P \leq 2.0\text{ VA}$

Contact circuit	
Limit relay Terminal connections: Channel 1 (CH1): 4, 5, 6 Channel 2 (CH2): 15, 16, 17 ¹⁾	$U \leq 250\text{ V}_{AC}, I \leq 2\text{ A}, P \leq 500\text{ VA}$ at $\cos \varphi \geq 0.7$ $U \leq 40\text{ V}_{DC}, I \leq 2\text{ A}, P \leq 80\text{ W}$
Alarm relay Terminal connections: 15, 16, 17 ¹⁾	

1) dependent on the configuration

Sensor circuit					
Terminal connections: Channel 1 (CH1): 9 Channel 2 (CH2): 8 ¹⁾ Earth: 7	Connection data:	$U_0 \leq 12.9 \text{ V}$ $I_0 \leq 15.5 \text{ mA}$ $P_0 \leq 116 \text{ mW}$ Trapezium-shaped characteristic			
		[Ex ia Ga] IIC		[Ex ia Ga] IIB	
		L_o	C_o	L_o	C_o
	Max. external capacitance at max. external inductance	0.5 mH	710 nF	2.0 mH	2.9 μF
		1.0 mH	550 nF	5.0 mH	2.1 μF
	Max. external capacitance or max. external inductance	10 mH	1.0 μF	15 mH	6.5 μF
If using explosion protection group [Ex ib Gb] IIC/IIB the application is limited to II (2) G		[Ex ib Gb] IIC		[Ex ib Gb] IIB	
		L_o	C_o	L_o	C_o
	Max. external capacitance or max. external inductance	10 mH	1.0 μF	15 mH	6.5 μF

1) dependent on the configuration



The values of the max. external capacitance and inductance of Group IIB are applicable for the explosion hazards arising from dust.



71512445

www.addresses.endress.com
