

Hazardous (Classified) Locations
 Class II, Division 1, Groups EFG
 Class III
 Class I, Zone 0 Group IIC

Class I, Division 2, Groups ABCD
 Class II, Division 1, Groups EFG
 Class III
 Class I, Zone 2 Group IIC

Non-hazardous area


CSA approved intrinsically safe apparatus

L/-, L/+

CSA approved intrinsically safe apparatus

L/-, L/+

Note wiring scheme on device!

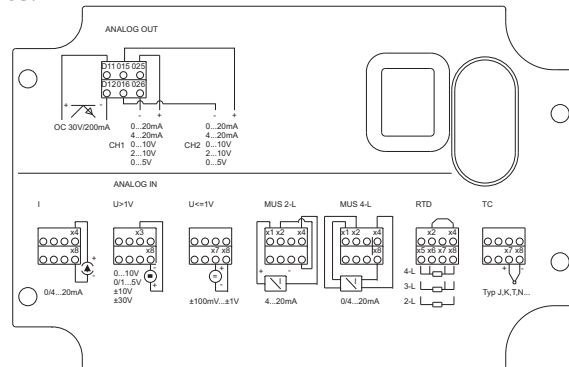

Installation Notes RIA46

- CSA Approved Apparatus must be installed in accordance with manufacturer's instructions.
- Depending on location install per National Electrical Code (CEC) using wiring methods.
- Use supply wires suitable for 5°C above surroundings.
- For Class II keep tight when circuits alive.
- The unit is installed in Class I, Division 2 area with two I.S. output channels (1 & 2), with cables clearance of 2 mm minimum.
- Warning: Substitution of components may impair suitability for Class I, Division 2.

INTRINSICALLY SAFE

Class I / Zone 0 [Ex ia] IIC

- The device is an Associated Intrinsically Safe equipment and must be installed in Division 2 or non-hazardous Locations only.
- Installation should be in accordance with the Canadian Electrical Code (CEC).
- For entity installations use certified equipment that satisfy the following condition
 $U_o/V_{oc} \leq V_{max}/U_i$ $I_o/I_{sc} \leq I_{max}/I_i$ $P_o \leq P_i$ $C_o/C_a \geq C_i + C_{cable}$ $L_o/L_a \geq L_i + L_{cable}$
- The Terminal of the intrinsically safe circuit must be placed at least a distance of 50mm from terminals of the non intrinsically safe circuits, or adequate separators (e.g. ground metal partitions) must be used.

NONINCENDIVE Field WIRING INSTALLATION Class I / Div. 2 / Groups ABCD

- The device is an Associated Nonincendive Safe equipment and must be installed in Division 2 or non-hazardous Locations only.
- The Nonincendive Field Wiring Circuit Concept allows interconnection of Nonincendive Field Wiring Apparatus with Associated Nonincendive Field Wiring Apparatus or Associated Intrinsically Safe Apparatus or Associated Apparatus not specifically examined in combination as a system using any of the wiring methods permitted for unclassified locations, when $V_{oc} \leq V_{max}$, $C_a \geq C_i + C_{cable}$, $L_a \geq L_i + L_{cable}$.
- For entity installations use certified equipment that satisfy the following condition
 $U_o/V_{oc} \leq V_{max}/U_i$ $I_o/I_{sc} \leq I_{max}/I_i$ $P_o \leq P_i$ $C_o/C_a \geq C_i + C_{cable}$ $L_o/L_a \geq L_i + L_{cable}$

Temperature range

T_a -40°C ... +60°C

ASSOCIATED INTRINSICALLY SAFE

Class I, Zone 0 [Ex ia] IIC
 Class I, Zone 2 Ex nA[ia] IIC

ASSOCIATED NONINCENDIVE

Class I / Div. 2 / Groups ABCD

T₄ -40°C ... +60°C

	Approved Pfanzelt	Date (yyyy-mm-dd) 2009-05-12	Drawing No. 12 04 00 112	Dwg.rev. A	Revision no. W10618	Revision date (yyyy-mm-dd) 2010-06-08	Name MP	Material 71540268 XA02310R/09/EN/01.20	Endress+Hauser
Volume (mm³)	Designed Pfanzelt	Date (yyyy-mm-dd) 2009-05-11	Unit RIA46	Scale 1:1	Title CONTROL DRAWING CSA			Series	
Refer to protection notice ISO 16016	Edge of working parts ISO 13715	Geometrical tolerancing ISO 2768-mH-E	Part No. -	Format A4	AIS, ANI, NI			Objekt version Sheet 1 of 2	Endress + Hauser Wetzer GmbH+Co. KG Nesselwang / Germany



Power supply U ≤ 24...230 V AC/DC (-20%/+10%) 50/60 Hz
 Terminal L / +, L / -, PE

Output circuit limit relays U_{max} ≤ 250 VAC I_{max} ≤ 3A
 Terminal R12, R11, R13 or U_{max} ≤ 30 DC I_{max} ≤ 3A
 R22, R21, R23

CDI interface for device configuration

Impulse or Current output 0/4...20 mA
 Terminal O15, O16 or O25, O26 Um ≤ 250 V

Output collector I_{max} ≤ 200 mA
 Terminal D11, D12 Um ≤ 30 VDC

4-wire transmitter power supply: Voc ≤ 27.3 V
 Terminal 11, 12 or Isc ≤ 91.1 mA
 Terminal 21, 22 Po = 622 mW

Group A, B resp. IIC Ca = 80 nF La = 4.625 mH
 Group C, D resp. IIB, IIA Ca = 675 nF La = 19.125 mH

4-wire transmitter power supply: Voc ≤ 27.3 V
 Terminal 14, 18 or Isc ≤ 5 mA
 Terminal 24, 28 Po = 34.2 mW

Group A, B resp. IIC Ca = 80 nF La = 1.525 H
 Group C, D resp. IIB, IIA Ca = 675 nF La = 6.325 H

temperature input (RTD, TC): Voc ≤ 27.3 V
 Terminal 15, 16, 17, 18 and 12, 14 or Isc ≤ 22.1 mA
 Terminal 25, 26, 27, 28 and 22, 24 Po = 151 mW

Group A, B resp. IIC Ca = 80 nF La = 81.725 mH
 Group C, D resp. IIB, IIA Ca = 675 nF La = 327.425 mH

Current input: Voc ≤ 27.3 V
 Terminal 14, 18 or Isc ≤ 5 mA
 Terminal 24, 28 Po = 34.2 mW

Group A, B resp. IIC Ca = 80 nF La = 1.525 H
 Group C, D resp. IIB, IIA Ca = 675 nF La = 6.325 H

Voltage input: Voc ≤ 27.3 V
 Terminal 17, 18 and 13, 18 or Isc ≤ 5 mA
 Terminal 27, 28 and 23, 28 Po = 34.2 mW

Group A, B resp. IIC Ca = 80 nF La = 1.525 H
 Group C, D resp. IIB, IIA Ca = 675 nF La = 6.325 H

ASSOCIATED INTRINSICALLY SAFE

**Cl. I, Gps ABCD
Cl. II, Gps EFG, Cl. III
Cl. I, Zone 0, IIC**

Voc ≤ Vmax Isc ≤ Imax Po ≤ Pi
Ca ≥ Ci + Ccable La ≥ Li + Lcable

ASSOCIATED NONINCENDIVE FIELD WIRING I,II,III/2/ABCDEFG

Voc ≤ Vmax Ca ≥ Ci + Ccable La ≥ Li + Lcable

Entity parameters for channel 1&2 – Only one connected at a time:

2-wire transmitter power supply: Voc ≤ 27.3 V
Terminal 11, 14, 12, 18 or Isc ≤ 96.5 mA
Terminal 21, 24, 22, 28 Po = 659 mW

Group A, B resp. IIC Ca = 80 nF La = 4.125 mH
Group C, D resp. IIB, IIA Ca = 675 nF La = 17.025 mH

	Approved Pfanzelt	Date (yyyy-mm-dd) 2009-05-12	Drawing No. 12 04 00 112	Dwg.rev. -	Revision no. -	Revision date (yyyy-mm-dd) -	Name -	Material 71540268 XA02310R/09/EN/01.20	Endress+Hauser
Volume (mm ³)	Designed Pfanzelt	Date (yyyy-mm-dd) 2009-05-11	Unit RIA46	Scale 1:1	Title CONTROL DRAWING CSA AIS, ANI, NI		Series		
Refer to protection notice ISO 16016	Edge of working parts ISO 13715	Geometrical tolerancing ISO 2768-mH-E	Part No. -	Format A4	Objekt version	Sheet 2 of 2	Endress + Hauser Wetzer GmbH+Co. KG Nesselwang / Germany		